



Technical data sheets

Max. capacity / with 7.2 twinchtl	4 999 kg
Max. lifting height	20.60 m
Max. outreach	17.90 m
Engine brand	Mercedes stage IV / Final tier 4
Power	156 ch / 115 kw
Laden drawbar pull	7 900 daN
Overall width	2.49 m
Overall width (with stabilizers lowered)	5.55 m
Overall height	3.05 m
Overall length to carriage	6.87 m
Ground clearance	0.35 m
Turning radius (over tires)	4.88 m
Unladen weight (with forks)	17 930 kg


Rotation on lowered stabilizers
with forks

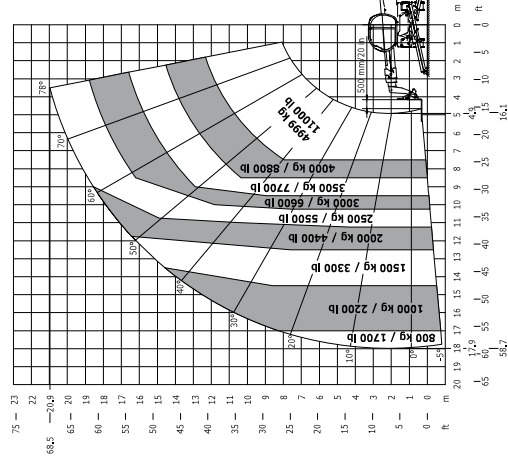

Rotation on lowered stabilizers
with 1500 kg jib

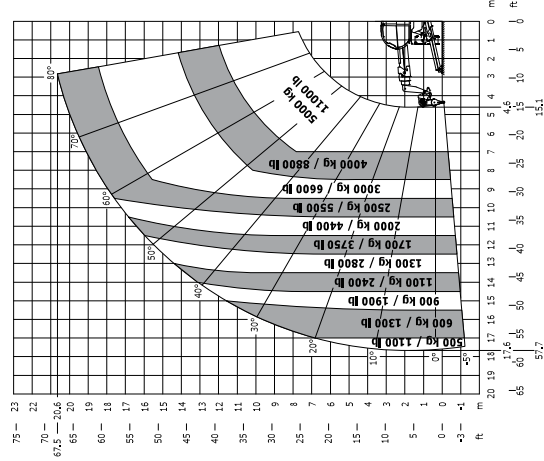


Rotation on lowered stabilizers
with 365 kg platform

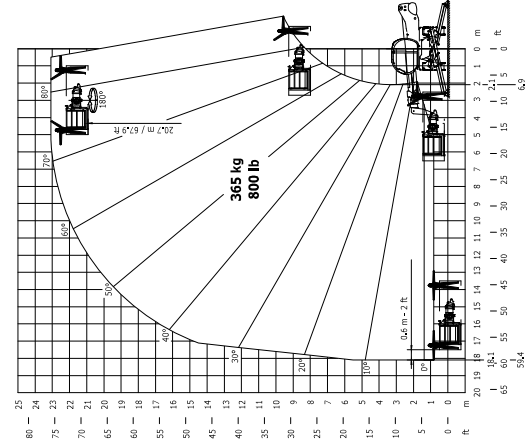



LES EQUIPEMENTS
DE SERIE & OPTIONS

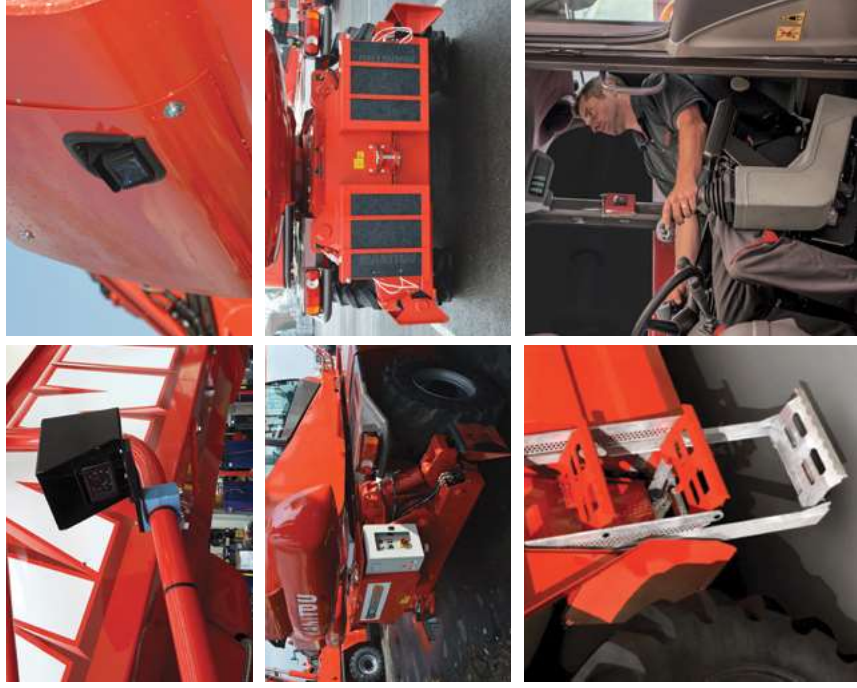

S: Standard / O: optional / - not available

	MRT 2150 / 2550	MRT 2470 / 3050	MRT 3255
General			
Battery cut-off	S	S	S
24 V start-up platform	S	S	S
Internal rear-view mirror	S	S	S
Electric window	S	S	S
Roof screen wiper	S	S	S
Automatic levelling	S	S	S
Automatic stabilization	--	S	--
Restriction of work areas	S	S	S
Reduction in movement speeds	S	S	S
Speed control	--	S	S
Platform predisposition and radio-control	O	O	O
Comfort			
Fabric seat	S	S	O
Air-conditioning	O	O	O
Pneumatic fabric seat	O	O	O
Heated pneumatic fabric seat	O	O	O
Tilting seat	O	O	S
MP3 car radio	O	O	O
Bluetooth radio	O	O	O
Hydraulics			
Attachment line	S	S	S
Return to tank	S	S	S
Dual function on boom head	O	O	O
Triple function on boom head	O	O	O
Lock attachment	O	O	O
Forced march	O	O	O
Chassis suspension	--	--	S
Boom suspension	O	O	O
Electricity / Security			
E-Reco	S	S	S
Reverse alarm	S	S	S
Front work lights	O	O	O
Rear work lights	O	O	O
Work lights on the boom	O	O	O
Camera on the boom head	O	O	O
Side camera	O	O	O
Rear camera	O	O	O
Bi-energy	O	O	O